




Main features

- Temperature limits:
 - 40 ... + 750° C for type J
 - 40 ... + 1200° C for type K(see table for sheath diameters)
- Tolerance (IEC standard 584.2/Class 2):
 - $\pm 2.5^{\circ} \text{C}$ (- 40 ... + 333° C)
 - $\pm 0.0075 [t]$ (t > + 333° C)
- Ceramic insulation of the thermocouple element
- Suitable for direct insertion into molten metal

MODELS

TC10 A
with shoulder bend

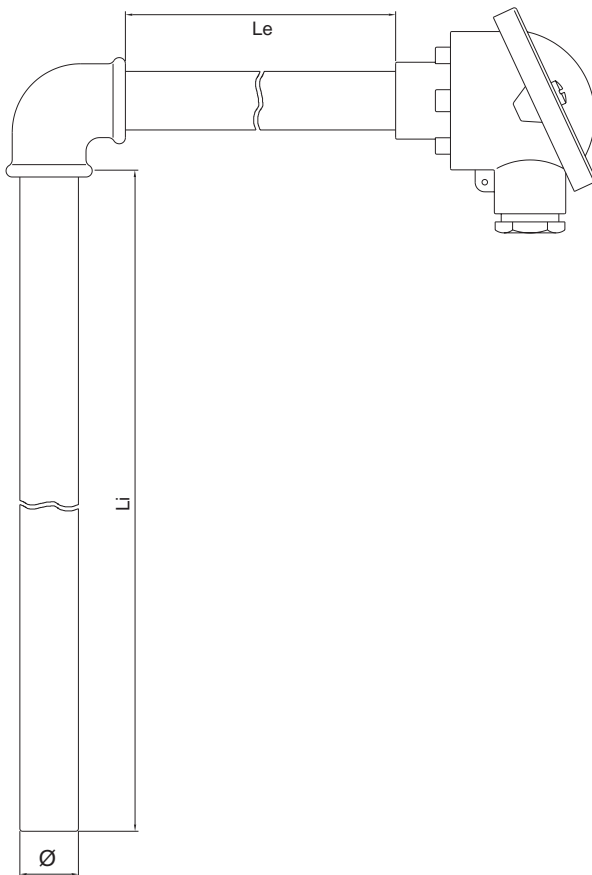

TC10 B
with angle flange

