




Main features


- Temperature limits:
 - 40 ... + 750° C for type J
 - 40 ... + 900° C for type E
 - 40 ... + 1000° C for type K
 (see table for sheath diameters)
- Tolerance (IEC standard 584.2/Class 2):
 - $\pm 2.5^{\circ} \text{C}$ (- 40 ... + 333° C)
 - $\pm 0.0075 [t]$ (t > + 333° C)
- Ceramic insulation of the thermocouple element
- Application versatility

MODELS


TC8 A
without fitting

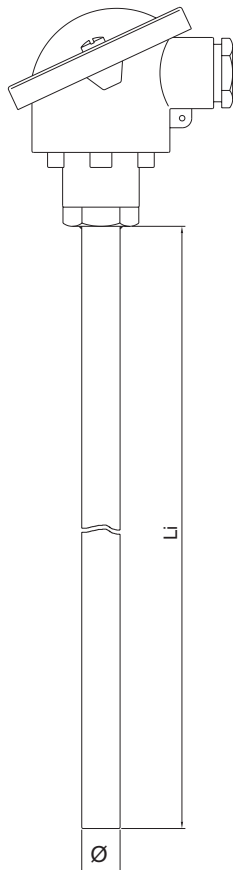


TC8 B
with adjustable flange

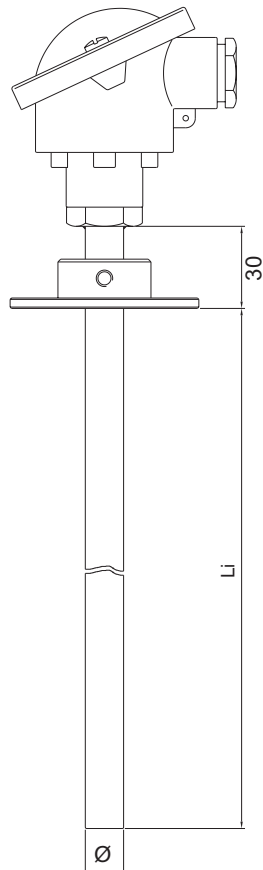

TC8 C
with welded fitting

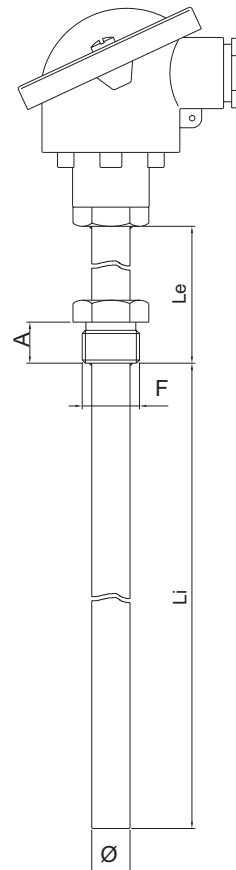

TC8 D
with welded fitting
under the head

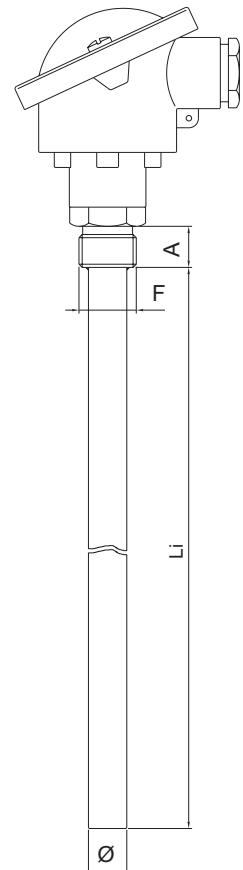

ORDER CODE

CODE T C 8 0 0 0 X X X X X X

Model	
Without fitting	A
With adjustable flange	B
With welded fitting	C
With welded fitting under the head	D

Element + Hot Junction	
Single Insulated	1
Single Grounded	2
Double Insulated	3
Double Grounded	4

Thermocouple Type	
Fe - Cu/Ni	J
Ni/Cr - Ni/Al	K
Ni/Cr - Cu/Ni	E

Connection Head	
DIN B	C
DIN A	D
DIN BUS	E
EEX d IIC 2GD	F
CEAA	H

Sheath Material	
AISI 304	A
AISI 310	B
AISI 316	C
INCONEL 600	F

Sheath Diameter (mm)	
16	O
17.2 (3/8")	P
21.3 (1/2")	Q
26.7 (3/4")	T

Connection Thread *		
1/2" GAS	"A"= 15mm	D
3/4" GAS	"A"= 18mm	E
1" GAS	"A"= 18mm	F
1/2" NPT		J
3/4" NPT		K
1" NPT		L

(*) To be shown for C and D models only

Conn. / Flange Material	
300 series stainless steel	2 *
Aluminium	4 **
Carbon steel	5 **

(*) For fittings only
(**) For flanges only


Certificates	
A	Conformity Report
R	Calibration Report
T	SIT Certificate

LENGTHS AND ACCESSORIES


Li = Immersion Length (mm)	
Standard length from 200 to 2000mm with 50mm step	

Le = Extension Length (mm) (*)	
Standard length from 10 to 200mm with 10mm step	


(*) To be shown for TC8C model only




C




D




E




F



H



4



5

Mod. C - D		Availability of Mounts /Sheathing Diameter				
MOUNT (F)	A (mm)	Mount (F)	Ø16	Ø17.2	Ø21.3	Ø26.7
G 1/2	15	G 1/2	x	-	-	-
G 3/4	18	G 3/4	x	x	x	-
G 1	20	G 1	x	x	x	x
1/2 NPT	20	1/2 NPT	x	-	-	-
3/4 NPT	20	3/4 NPT	x	x	x	x
1 NPT	25	1 NPT	x	x	x	x

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice

GEFRAN spa
 via Sebina, 74
 25050 PROVAGLIO D'ISEO (BS) - ITALIA
 ph. 0309888.1 - fax. 0309839063
 Internet: <http://www.gefran.com>
www.gefranonline.com

